


PROOF UNDERLAYMENT

HIGH PERFORMANCE ROOFING UNDERLAYMENT

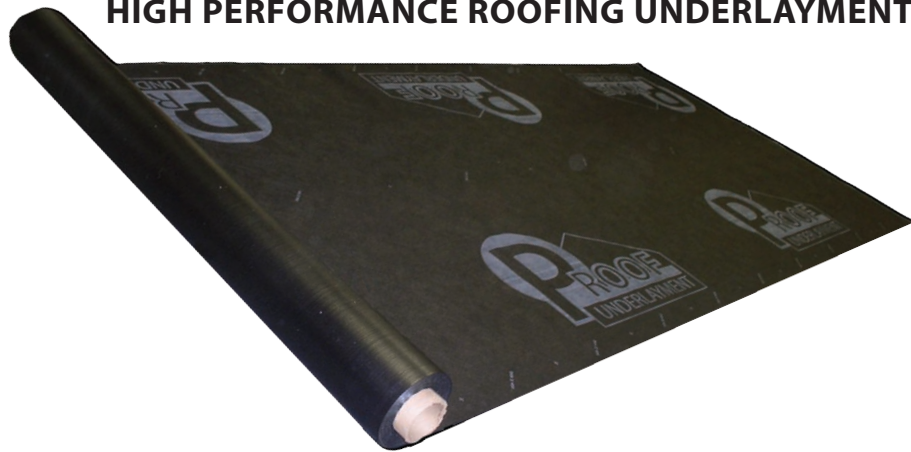

Proof™ is a durable, cross-woven underlayment to be used in place of traditional roofing paper. It is 10 mil thick and can be used under virtually all types of roofing. **Proof™** includes a slip-resistant outer surface and is engineered with excellent tensile strength and tear resistance.

Proof™ is strong enough to protect from potential damaging weather conditions such as rain, snow, ice, hail, sleet and wind. Furthermore, **Proof™** is able to hold up to several months of UV exposure. It is manufactured with the ability to hold a chalk line, and its slip resistant coating helps keep workers safe. **Proof™** combines the technology of felt and synthetic underlayments to produce a product that will help get the job done right.

FEATURES

- Class A fire rating
- Longer UV exposure than felt
- High tear resistance
- Moisture resistant
- Anti-slip coating
- Covers 10 squares per roll
- Lightweight

SPECS

CONSTRUCTION:	8x8 HDPE laminated to point bonded PP coated with high COF co-polymers for traction
WEIGHT:	4.75 oz./sq. yd. (+/- 10%) (ASTM D-1910)
TENSILE STRENGTH:	125 lbs. warp x 125 lbs. weft (ASTMD-751, Grab)
TEAR STRENGTH:	40 lbs. warp x 40 lbs. weft (ASTMD-751, Tongue)
ELONGATION	30% MD x 22% CD
THICKNESS:	10 Mil
ROLL SIZE:	5' x 200'
COVERAGE:	10 Squares

These are typical property values and are intended as guides only. The figures listed do not represent specification limits.



InsulationSolutions
1-866-698-6562
www.insulationsolutions.com